


Schéma de branchement - Connexion diagram

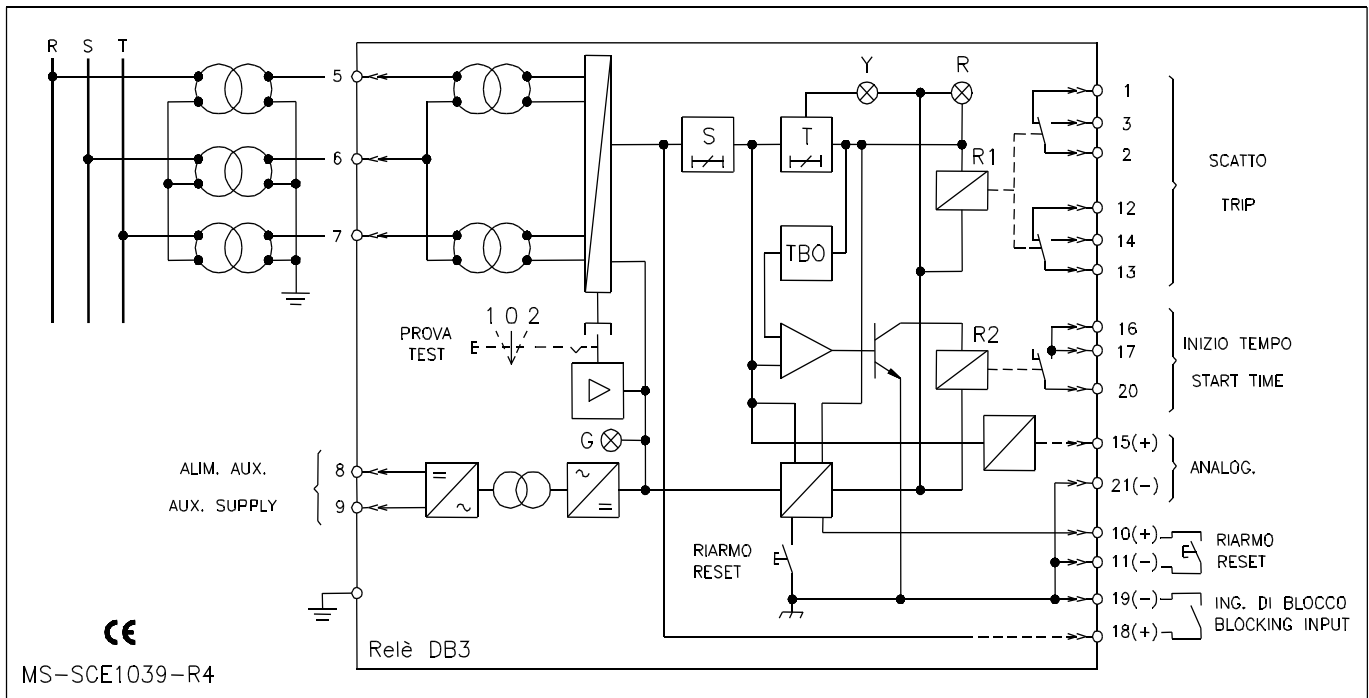

Informations à fournir à la commande - Ordering data

- DB3/D, temps constant / *Definite time*
- DB3/I, temps inverse / *Inverse time*

Source auxiliaire - Power supply

- Type 1 : 24...100 Vac - 24...125 Vdc +/-20%
- Type 2 : 80...220 Vac - 90...250 Vdc +/-20%

Montage - Execution

- Encastré - *Flush mounting*
- En saillie - *Surface mounting*
- Rack 19" 3U - *Standard rack 19 3U*

Calibre - Rated input

- Un = 100v
- Un = 110V
- Un = 220V
- Un = 380V
- Fn = 50Hz
- Fn = 60Hz

Seuils - Settings range

- Ka = 1: S = 4...19 % Vn
- Ka = 2: S = 4...34% Vn
- Ka = 3: S = 4...49% Vn

Temporisations - Time delays

- Kt = 0.5: Ts = 0.05...8 sec
- Kt = 1: Ts = 1...16 sec
- Kt = 2: Ts = 2...32 sec

Entrée/Sortie - Input/Output

- 1 sortie temporisée avec 2 inverseurs
1 delayed output with 2 reversing switches
- Sortie Blocage - *Blocking output*
- Sortie analogique - *Analogic output*
- Entrée blocage - *Blocking input*

Demande spéciale
Special request

Quantité
Quantity

