


Schéma de branchement - Connexion Diagram

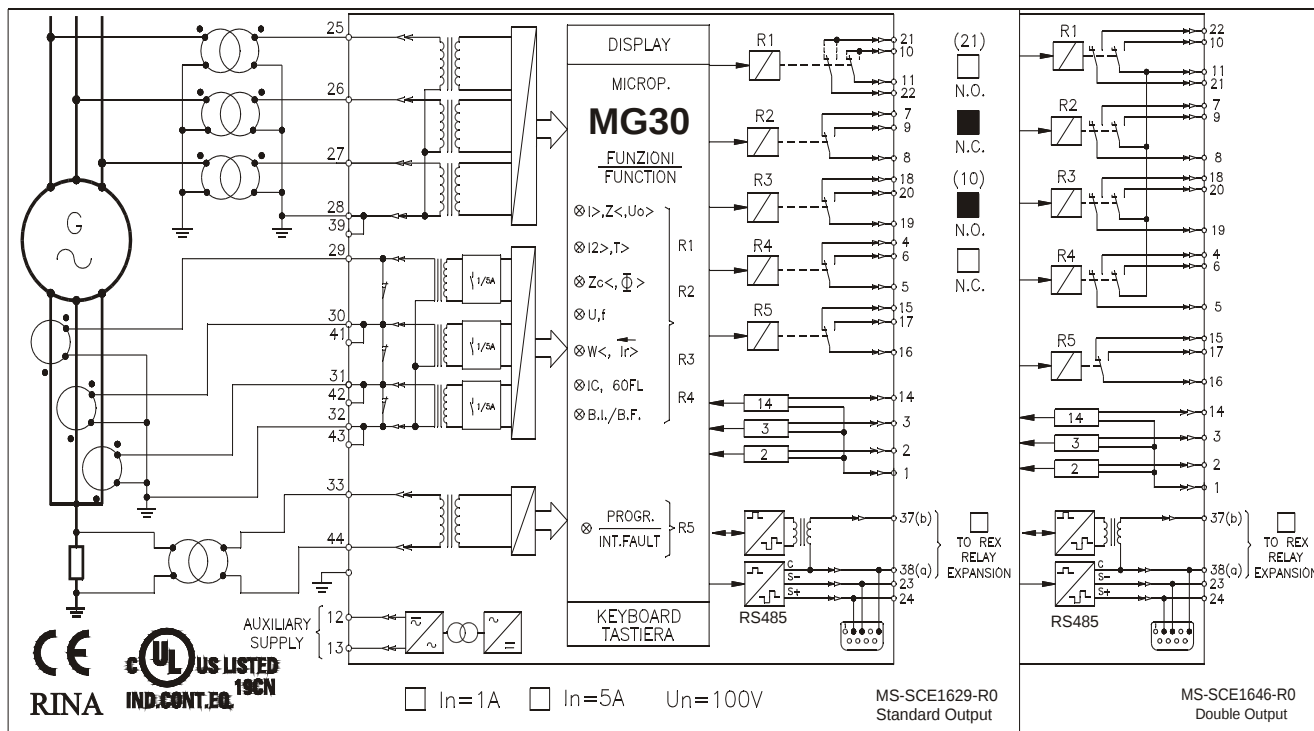

Informations à fournir à la commande - Ordering data

- ☐ MG30
- ☐ MG30 - X

Source auxiliaire - Power supply

- ☐ Type 1 : 24...110 Vca - 24...125 Vcc +/- 20%
- ☐ Type 2 : 80...220 Vca - 90...250 Vcc +/- 20%

Montage - Execution

- ☐ Encastré - Flush mounting
- ☐ En saillie - Surface mounting
- ☐ Rack 19" 3U - Standard rack 19"3U

Calibre nominal - Rated input

- ☒ Un = 50 V...125V
- ☐ In = 5 A
- ☐ In = 1 A

Demande spéciale
Special request

Quantité
Quantity



MicroEner