


CONNECTION

Compalarm DR8 relays repeater CONNECTIONS

DR8 repeaters can be used with any alarm system Compalarm Dm series, and allows to repeat remote alarms by relays.

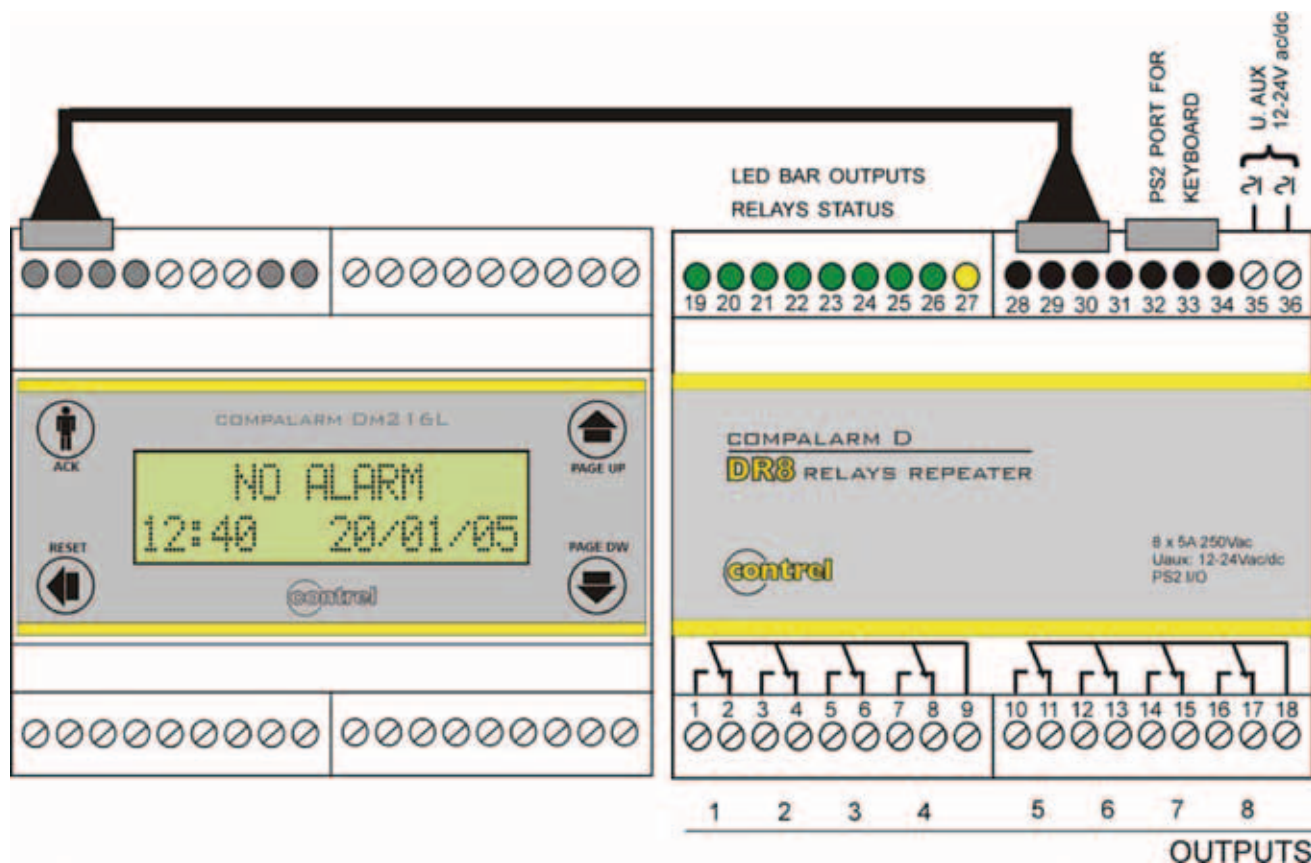

1	NO CONTACT OUTPUT 1	15	NC CONTACT OUTPUT 7
2	NC CONTACT OUTPUT 1	16	NO CONTACT OUTPUT 8
3	NO CONTACT OUTPUT 2	17	NC CONTACT OUTPUT 8
4	NC CONTACT OUTPUT 2	18	COMMUN OUTPUTS 5-6-7-8
5	NO CONTACT OUTPUT 3	19	LED STATUS OUTPUT 1
6	NC CONTACT OUTPUT 3	20	LED STATUS OUTPUT 2
7	NO CONTACT OUTPUT 4	21	LED STATUS OUTPUT 3
8	NC CONTACT OUTPUT 4	22	LED STATUS OUTPUT 4
9	COMMON OUTPUTS 1-2-3-4	23	LED STATUS OUTPUT 5
10	NO CONTACT OUTPUT 5	24	LED STATUS OUTPUT 6
11	NC CONTACT OUTPUT 5	25	LED STATUS OUTPUT 7
12	NO CONTACT OUTPUT 6	26	LED STATUS OUTPUT 8
13	NC CONTACT OUTPUT 6	27	LED SYSTEM OK
14	NO CONTACT OUTPUT 7	35-36	POWER SUPPLY: 12-24Vac/dc