


INTERFACE CONVERTER RS485/232 TYPE - CPSC

- Optically isolated 2kV-RMS - 5kV impulse
- RX/TX autoswitching
- Self powered
- ON/OFF configurable ECHO
- Transmission speed 9600bps (other speed on request)
- Includes 1m length of cable at both ends with 9 pin D-connector

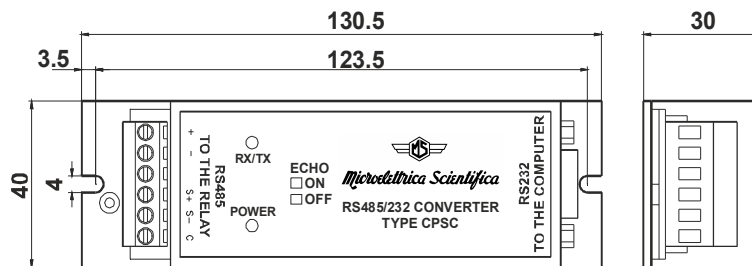

FIBER OPTIC CONVERTERS TYPE - CF-V

- 1) Fiber optic converter RS485/OPTICAL - Self powered from relays
- 2) Fiber optic converter RS232/OPTICAL - Externally powered 6V

- 1-2 - RX/TX Autoswitching
- 1-2 - Transmission speed 9600bps (other speeds on request)
- 1-2 - Glass Fiber 62.5/125 μ
- 1-2 - Fiber connector type ST
- 1-2 - Max transmission distance 1000m

