


Schéma de branchement - Connexion Diagram

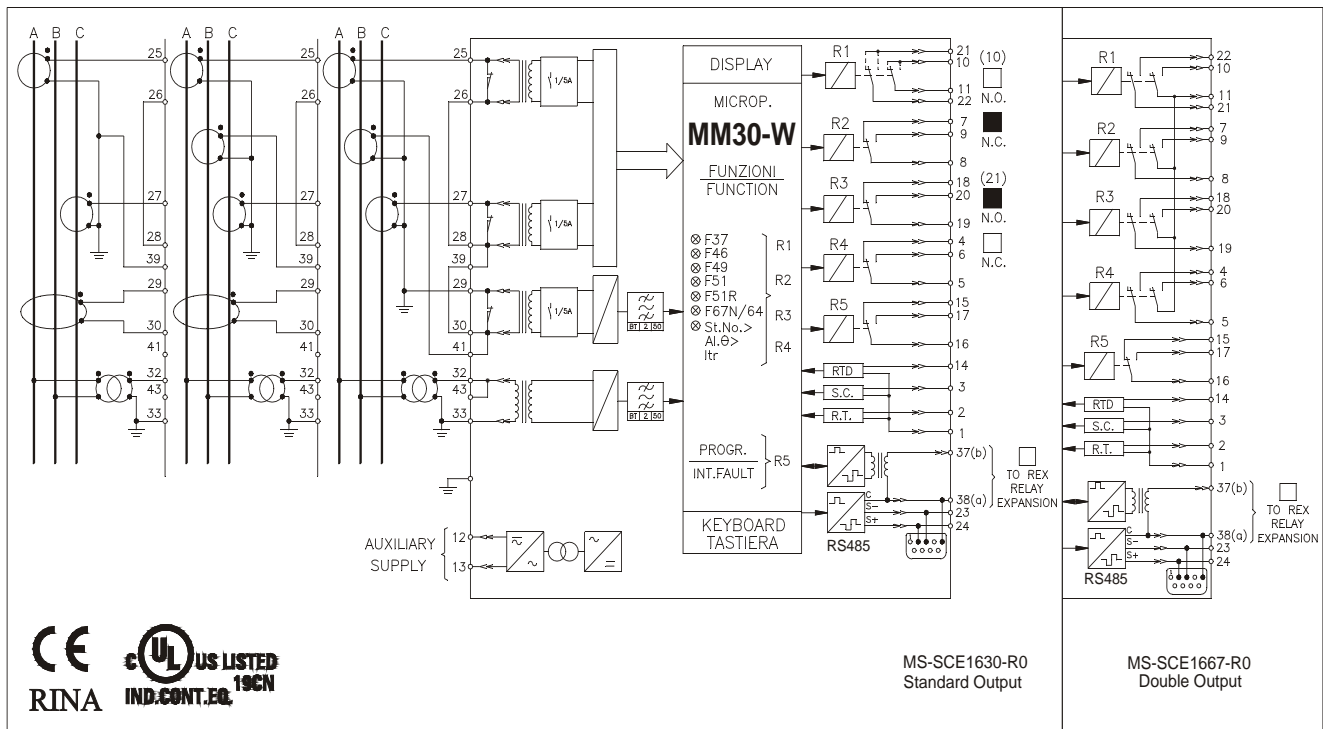

Informations à fournir à la commande - Ordering data

- MM30/W
- MM30/W-X

Source auxiliaire - Power supply

- Type 1 : 24...110 Vca - 24...125 Vcc +/- 20%
- Type 2 : 80...220 Vca - 90...250 Vcc +/- 20%

Montage - Execution

- Encastré - Flush mounting
- En saillie - Surface mounting
- Rack 19" 3U - Standard rack 19"3U

Calibre nominal - Rated input

- Un = 100 V - 125 V
- In = 5 A
- In = 1 A
- Ion = 5 A
- Ion = 1 A

**Demande spéciale
Special request** _____

**Quantité
Quantity** _____